


BUTTERFLY VALVES

DN 16"… 80" PN 0,25…1,6 MPa

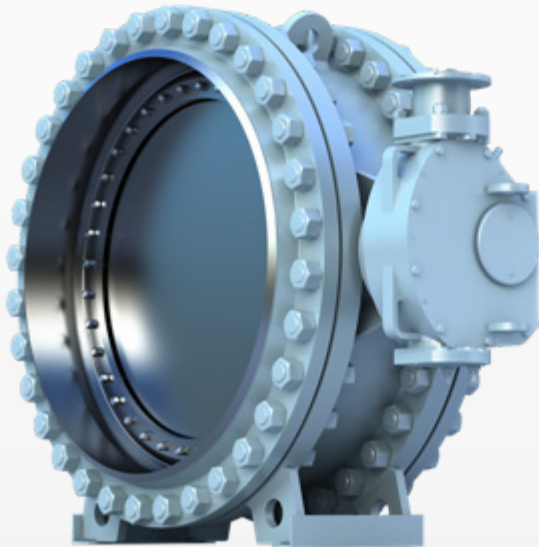

Application

Performing shut-off function at pipelines transporting

- *air*,
- *steam*,
- *water*,
- *oil* and other non-aggressive and non-toxic liquid mediums at the temperature up to **+100°C**.

Design standard: GOST.

Tightness: complete tightness (zero leakage).

Line medium flow: bidirectional.

Mounting at the pipeline: horizontal position of the disk pivot.

Connection: flanged.

Operation: gear, electric actuator.


Materials: CS.

Service life: 12 years.

BUTTERFLY VALVES

DN 16" ... 80" PN 0,25...1,6 MPa

Design Features

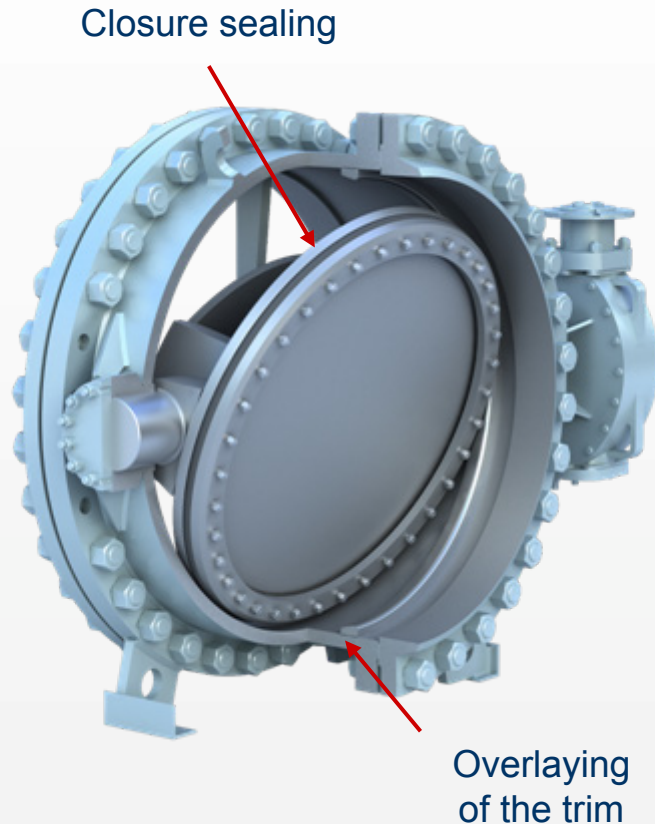

1. Full bore.
2. Wear-resistant body sealing.
3. Soft closure sealing.
4. Easy replacement of the closure sealing ring.
5. Size-conscious design.
6. Corrosion-resistant overlaying of the trim.