

THROUGH CONDUIT GATE VALVES

DN 12" ...48" Class 150...900



Application

Designed for pipelines transporting

- *oil,*
- *petrochemical products,*
- *synthetic oil*

and other explosive flammable liquids at temperature up to + **80°C**

Extended temperature range up to + **150°C** is available upon Customer's request.

Design standard: API 6D

Fire safe design: API 6FA

Operation: gear, electric actuator

Bore: full bore

Connection: BW


Materials: CS, LTCS upon Customer's request

Service life: 30 years

THROUGH CONDUIT GATE VALVES

DN 12" ...48" Class 150...900

Design Features

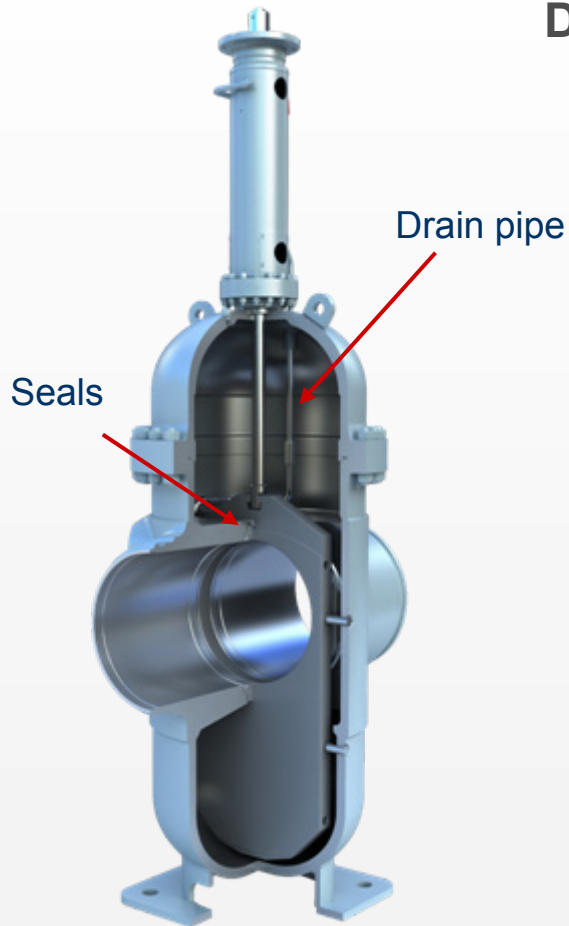

1. Hard body.
2. **Replaceable seals.**
3. Insensitivity to impurities.
4. Double Block and Bleed seats.
5. ENP coating of locking elements.
6. Anticorrosion coating for underground installation.
7. Stainless steel **drain pipe** installed inside the valve body.